


How to Install

1/4

POSITIONING

Mount within immediate reach using EVA Washer / screws.

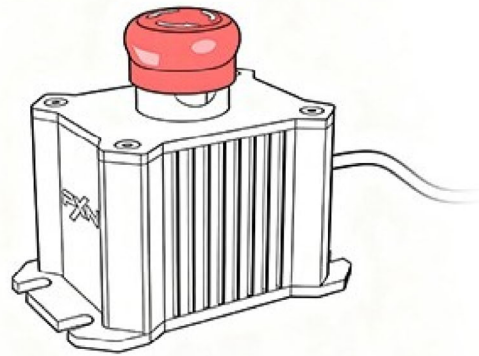

2/4

CABLE CONNECTION


Connect RJ11 cable to the wheel base and ensure button is released (rotated clockwise).



3/4

EMERGENCY OPERATION

STRIKE BUTTON during runaway to instantly cut the wheel base power.

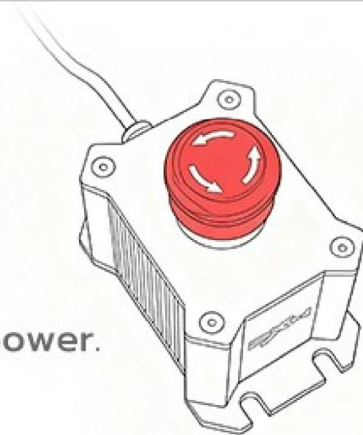

4/4

SYSTEM RESET

Confirm device safety rotate clockwise to restart then race resumption.

